


A large stack of logs is shown in a metal frame, used for shuttering plywood. The logs are stacked in a way that they are held together by the frame, and the ends of the logs are visible, showing the wood grain and knots. The frame is made of dark metal bars. The background is a lush green forest. The foreground is a dark, mulched area with some green grass.


KMA

SHUTTERING PLYWOOD

FILM FACED PLYWOOD SHUTTERING PLYWOOD CONSTRUCTION PLYWOOD

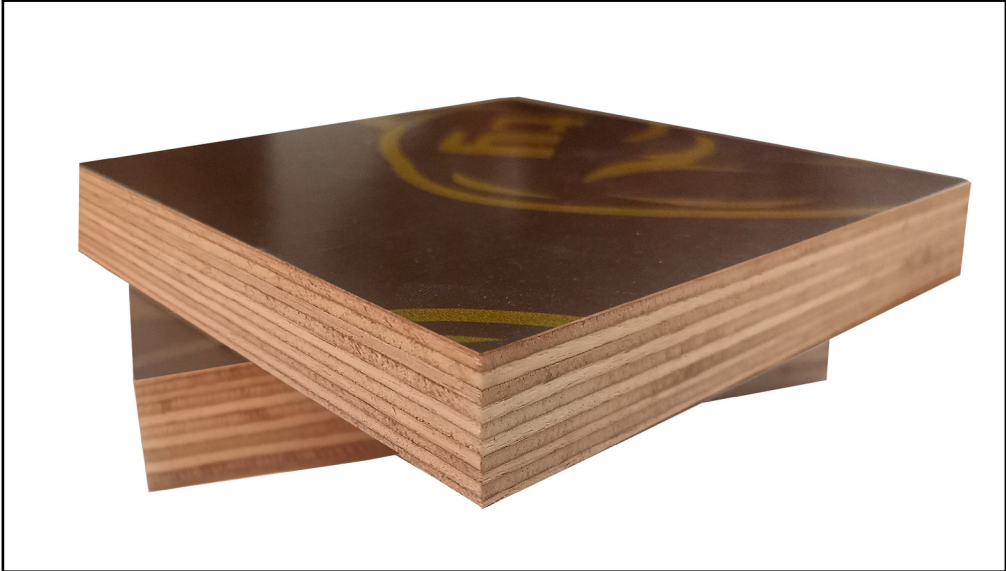

SHUTTERING PLYWOOD TECHNICAL DETAILS

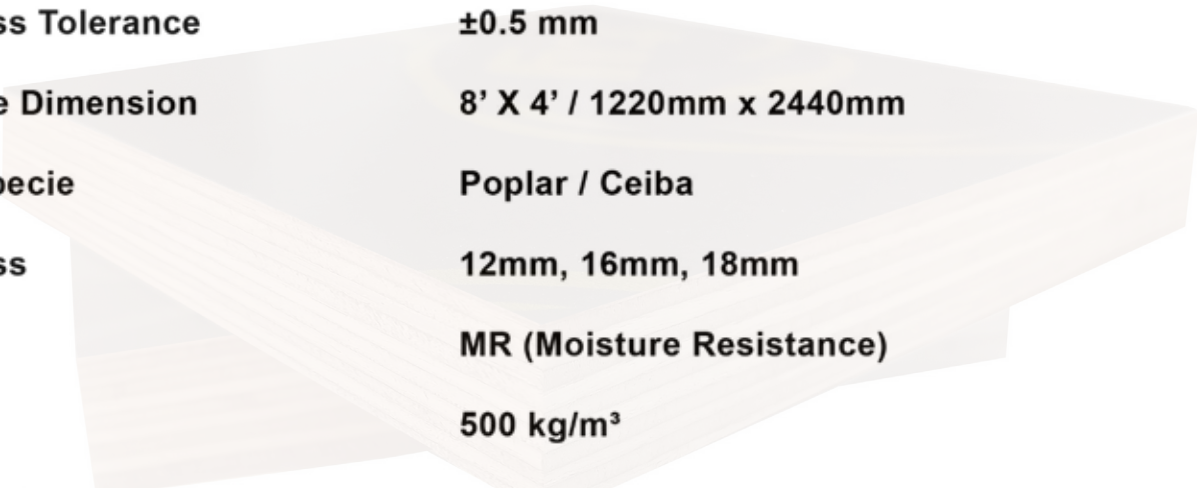

Product Type	Film Faced Plywood / Formwork Plywood
Thickness Tolerance	±0.5 mm
Available Dimension	8' X 4' / 1220mm x 2440mm
Wood Specie	Poplar / Ceiba
Thickness	12mm, 16mm, 18mm
Glue	MR (Moisture Resistance)
Density	500 kg/m³
Bending Strength	M.O.E8637.83 N/mm² M.O.R 32.81 N/mm²
Internal Bonding (IB)	0.56 N/mm²
Screw Strength (Edge)	956 N
Screw Strength (Face)	1092 N
End Uses	Construction and Building Concrete Formwork

KMA